

ClearWater Tech, LLC

## POINT-OF-ENTRY (POE) OZONE SYSTEM

An *EcoTex* Series Product



COLLEGE HOUSING



UNIVERSITY HOUSING



APARTMENTS



COIN-OP LAUNDRY



CONDOMINIUMS



POE12 Ozone System

### MULTI-HOUSING, COIN-OP, & SEMI-COMMERCIAL (OPL) LAUNDRY

ClearWater Tech (CWT), manufacturers of EcoTex - The Cold Water Catalyst Systems for on-premise laundry applications, introduces the POE (Point-Of-Entry) ozone system. Advertise the multi-family, coin-op, and semi-commercial (small OPL) laundry facility (where multiple small washers are being used), as sustainable and eco-friendly with the POE.

Ozone is the perfect element. It promotes cold water washing to reduce energy consumption, water use, and cycles times, while your customers reduce chemical use, and experience the best wash quality!

This single point ozone system can supply multiple washers, providing cold-ozone enriched water up to 40 GPM through the system. The POE is a skid mounted, plug-and-play ozone system. Simply provide water to the POE system, connect the outlet water supply to multiple washers, and provide power.

### BENEFITS

- Advertise your facility as “Green”, “Sustainable”, or “Eco-friendly”
- Reduce facility costs
- Return on investment
- Cold water wash reduces energy
- Less detergent, rinsing, & drying
- Extended linen life
- Whiter, fresher, softer linen
- Reduce effluent waste
- Designed & made in the USA

### APPLICATIONS

- University & college housing laundry
- Apartment & condominium laundry
- Coin-op laundry
- Semi-commercial on-premise laundry (OPL)

### FEATURES

- Turn-key & pre-plumbed
- Powder coated steel construction
- Ozone generator with built-in air dryer
- Ozone injection system with contact tank
- Booster pump
- Circulation loop
- Automated controls
- Back flow prevention


**EcoTex**  
The Cold Water Catalyst

**EarthSafe**  
TECHNOLOGY

## POE SPECIFICATIONS

POE 12	
Dimensions	68" h x 29" w x 29"D
Ozone Generator	CD12/AD
Ozone Output	2.8 gr/hr @ 8 SCFH dry air @ 1% by weight
Amp draw @ 120V/60Hz	13.2 amps
Amp draw @ 240V/60Hz	6.8 amps
Amp draw @ 220V/50Hz	7.4 amps
Air Preparation	Dry air
Water Inlet Connection	1.25" fpt
Water Outlet Connection	1.25" fpt

## POE SCHEMATIC

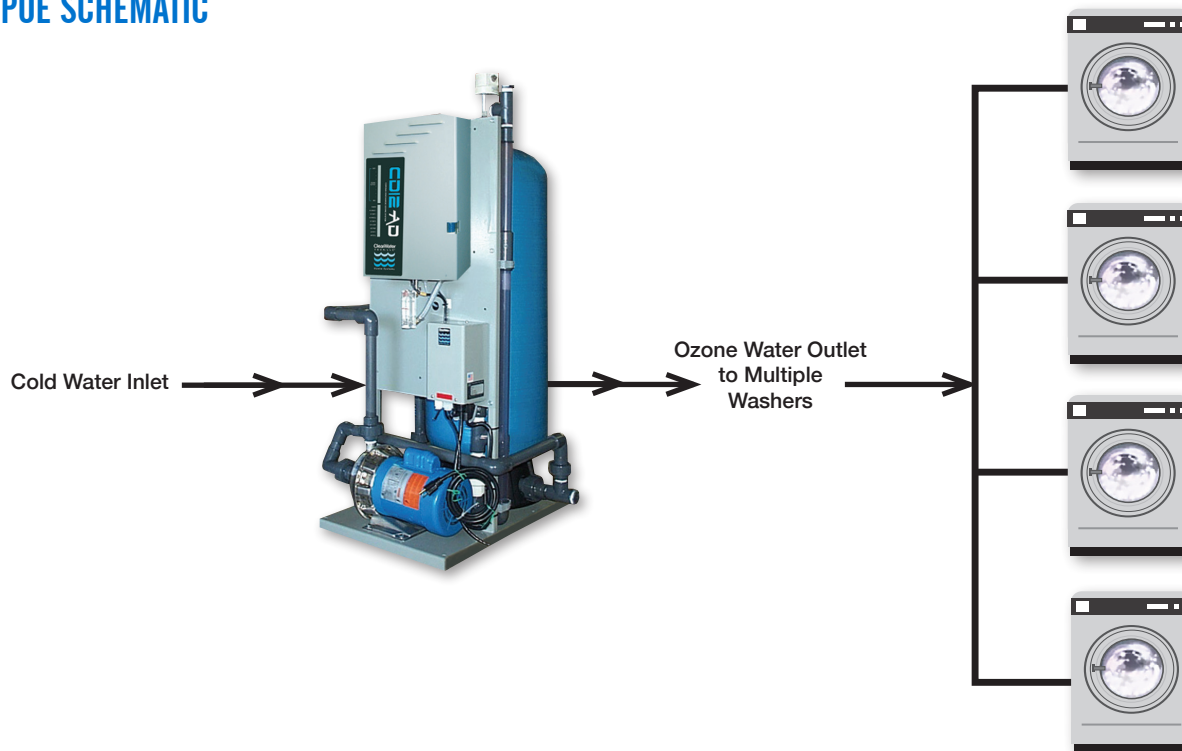

### ClearWater Tech, LLC

Ozone Systems for Water and Air Purification

800-262-0203 | 850 Capitolio Way, San Luis Obispo, CA 93401 | sales@ecotexozone.com | ecotexozone.com

REV051117