

# OXIDICE™

Ice Machine Disinfectant *for the Purest Ice Possible*



## Oxidice Ice Machine Disinfection

Oxidice is an energy-efficient disinfection system that treats the ice machine's incoming water supply. It reduces the growth of bacteria, molds, yeast and other contaminants by disinfecting the air, water, and surfaces within the machine.

Oxidice provides a natural sanitizer that extends the time between maintenance and cleaning, while creating a positive customer experience.

### APPLICATIONS

- Restaurants/Bars
- Breweries
- Hospitality
- Seafood Processing
- Cruise Ships
- Convenient Stores
- Manufacturing
- Business Offices
- Hospitals
- Schools
- Nursing Homes
- Bakeries
- Vending machines
- Grocery Stores

### FEATURES

- Variable ozone output
- LED status indicators
- Operator information readily available
- Microprocessor control
- Unique application method
- Universal power input
- Automated service timer

### BENEFITS


- Reduce ice machine maintenance visits
- Fits any sized machine
- Fast and simple installation
- Programmable for varying situations
- Treats both the water and the bin
- No chemicals. Nothing to fill or recharge.
- Only byproduct is oxygen

### OXIDICE SPECIFICATIONS

|                    |  |
|--------------------|--|
| Ozone Output       | 250 mg/hr @ 4.0 SCFH on Ambient Air                    |
| Outlet             | 3/16" Barb   |
| Power              | 90-230 VAC 50/60 Hz                                    |
| Ambient Conditions | 32° - 95°F; (0° - 35°C) 10 - 90 % RH<br>Non-Condensing |
| Air Flow           | 2 - 4 SCFH, Backpressure 2 PSI Max                     |
| Dimensions         | 7.50"h x 10.0"w x 3.70"d                               |
| Weight             | 3.50 lbs.  |



Ozone is Approved  
by the FDA & USDA

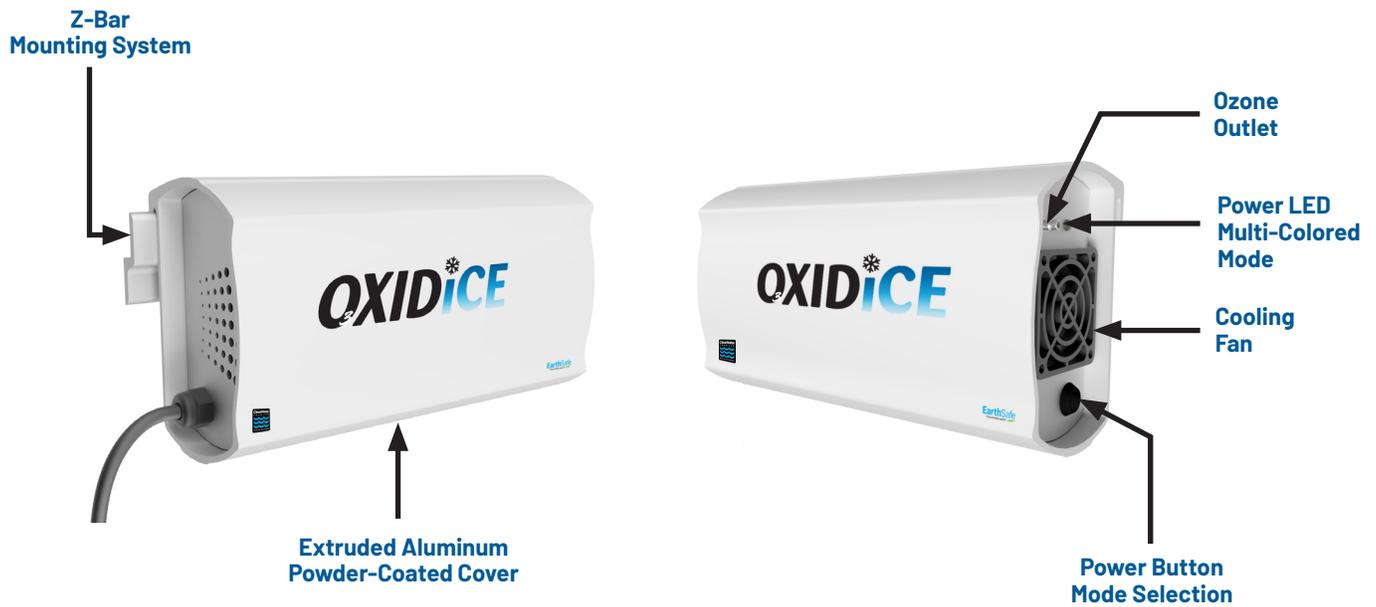

Oxidice can be used with most ice machines. The ozone production time can be increased or decreased based on the ice machines production rate within a 24-hour period, and the environment where the ice machine is used.

The following chart will assist with setting the Oxidice system's proper level to achieve the best anticipated results.

### OXIDICE SIZING CHART

| Light Color | Normal Environment | Extreme Environment | Run Time Every 10 Minutes |
|-------------|--------------------|---------------------|---------------------------|
| Off         | NA                 | NA                  | Off                       |
| Yellow      | < 400 lbs          | NA                  | 1                         |
| Green       | 400-600 lbs        | < 400 lbs           | 2                         |
| Blue        | 600-1000 lbs       | 400-600 lbs         | 4                         |
| Purple      | < 1000 lbs         | < 600 lbs           | 7                         |

#### ClearWater Tech a division of Pentair

Ozone Systems for Water and Air Purification

800-262-0203 | 850 Capitolio Way, San Luis Obispo, CA 93401 | sales@cwtozone.com | cwtozone.com